

Series of coaxial adapters with SMA connectors, operating frequency range from DC to 26.5 GHz, typical VSWR is 1.15 min., dielectric withstanding voltage is 1000 V.

TYPICAL APPLICATIONS

- Connecting different types of coaxial connectors
- Test and measurement equipment in RF or microwave engineering
- Antenna systems and RF installations
- Cable TV and satellite communication
- Telecommunications infrastructure
- Military and aerospace communication systems

FEATURES

- Small size
- Low VSWR

MECHANICAL SPECIFICATIONS

Inner conductor material	Brass (for male/male) or Beryllium copper (for others), Gold-plated
Dielectric material	PTFE
Housing	Passivated stainless steel
Coupling nut material	Passivated stainless steel
Operating temperature, °C	-20 – +60
Dimensions, mm	Check the outline drawings




ELECTRICAL SPECIFICATIONS

Operating frequency, GHz	26.5
Dielectric withstanding voltage, V	1000
VSWR typ.	1.15
Insulation resistance, MOhm	5000
Insertion loss, dB	$0.05\sqrt{f}$

NOMINAL IMPEDANCE: 50 Ohm

CONNECTOR TYPES: SMA male/female;
SMA male/female

LBWT-AC-26.5-SMAX-SMAX – specify connector genders
(Male/Male; Male/Female; Female/Female)

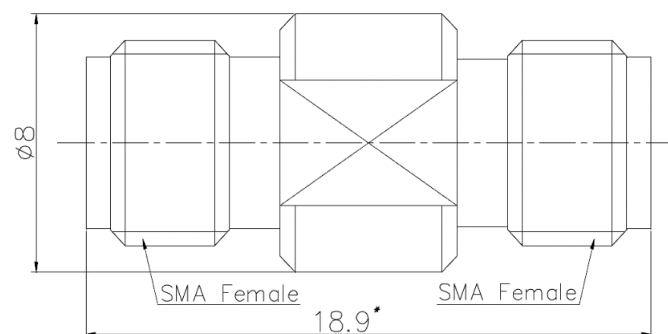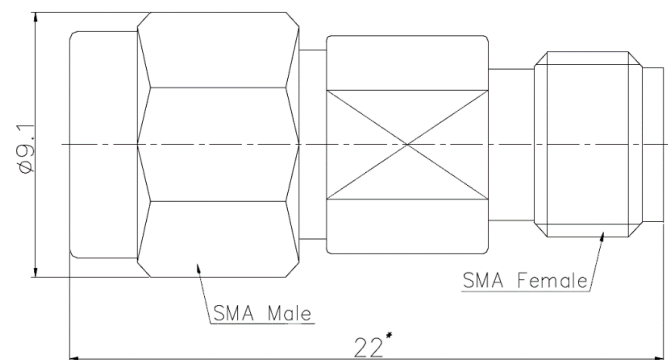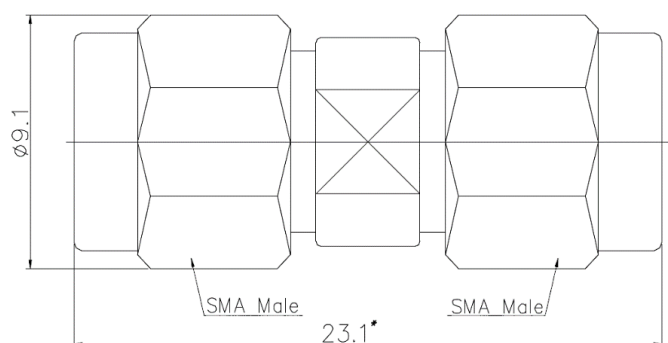

Notes:

1. All outline dimensions are in mm, with a dimensional tolerance of $\pm 5\%$.
2. Insertion loss is calculated as $0.05\sqrt{f}$, where f is the frequency in GHz.
3. Sizes marked with * are only for reference.