

Series of coaxial adapters with 2.4 mm and SSMP connectors, operating frequency range from DC to 40 GHz, VSWR is 1.20, dielectric withstanding voltage is 750 V.

TYPICAL APPLICATIONS

- Connecting different types of coaxial connectors
- Test and measurement equipment in RF or microwave engineering
- Antenna systems and RF installations
- Cable TV and satellite communication
- Telecommunications infrastructure
- Military and aerospace communication systems

FEATURES

- Small size
- Low VSWR

MECHANICAL SPECIFICATIONS

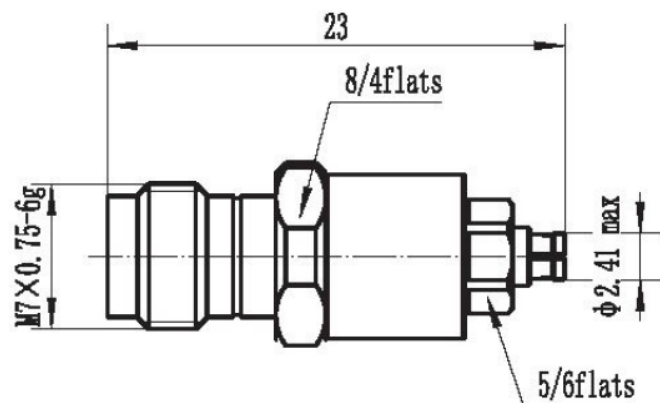
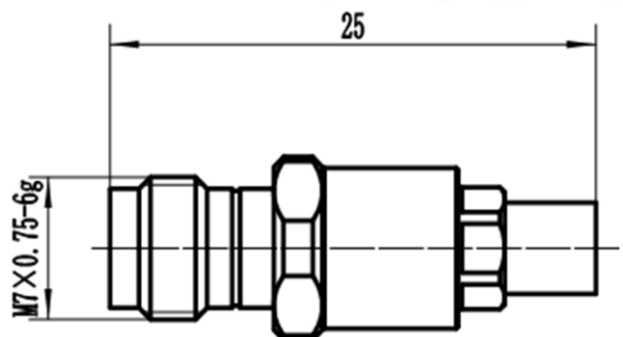
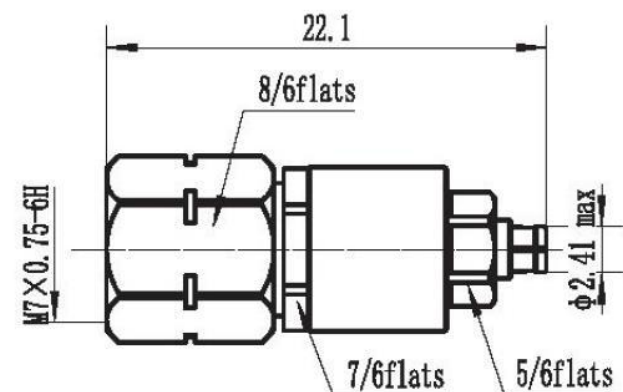
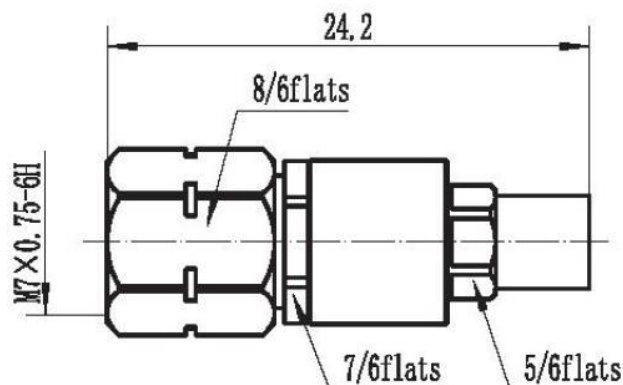
Inner conductor material	Gold-plated beryllium copper
Dielectric material	PTFE&PEI
Housing	Passivated stainless steel
Coupling nut	Passivated stainless steel
Operating temperature, °C	-20 – +60
Dimensions, mm	Check the outline drawings

ELECTRICAL SPECIFICATIONS

Operating frequency, GHz	40
Dielectric withstanding voltage, V	200 (for female/male) 750 (for others)
VSWR	1.30 max (for female/male) 1.20 (for others)
Insulation resistance, MOhm	5000
Insertion loss, dB	0.05√f

NOMINAL IMPEDANCE: 50 Ohm

CONNECTOR TYPES: **2.4 mm** male/female;
SSMP male/female


Ordering information:

LBWT-AC-40-2.4X-SSMPX – specify connector genders
(Male/Male; Male/Female; Female/Male; Female/Female)

Notes:

1. All outline dimensions are in mm, with a dimensional tolerance of $\pm 5\%$.
2. Insertion loss is calculated as $0.05\sqrt{f}$, where f is the frequency in GHz.