

Waveguide to coaxial adapter with 1.85 mm connector, operating frequency range from 26 to 40 GHz, max VSWR is 1.40.

TYPICAL APPLICATIONS

- Laboratory test and measurement
- Scientific research
- Satellite communication
- Telecommunications infrastructure
- Medical equipment
- Military and aerospace communication systems

FEATURES

- Wide frequency range
- Low VSWR and Insertion loss

MECHANICAL SPECIFICATIONS

Temperature, °C	-55 – +85
Dimensions, mm	Check the outline drawings

ELECTRICAL SPECIFICATIONS


Operating frequency range, GHz	26 – 40
Insertion loss, dB	0.25
VSWR	1.25
Power, W	3

NOMINAL IMPEDANCE: 50 Ohm

CONNECTOR TYPE: 2.4 mm, 2.92 mm male/female

WAVEGUIDE TYPE: WR28

FLANGE TYPE: UG-599/U

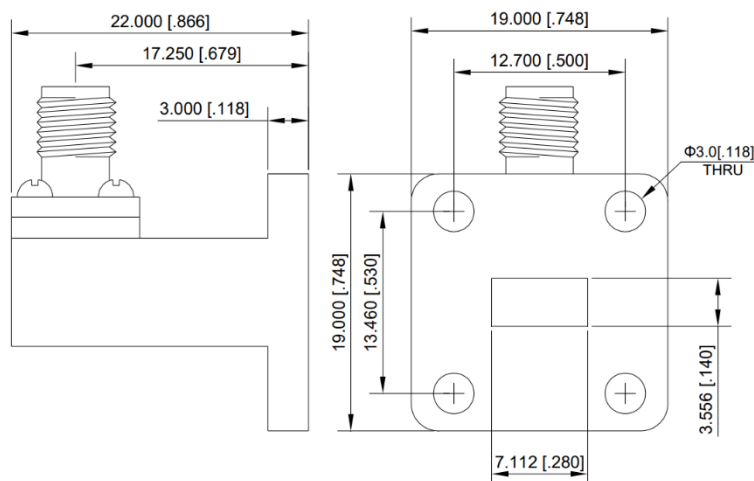

Ordering information:

LBWU-WAC-26.5/40-R-WR28-XX – specify connector type

LBWU-WAC-26.5/40-R-WR28-XX – specify connector gender (male or female)

Notes:

1. All outline dimensions are in mm, with a dimensional tolerance of $\pm 2\%$.